


## XF-PTL12208-C

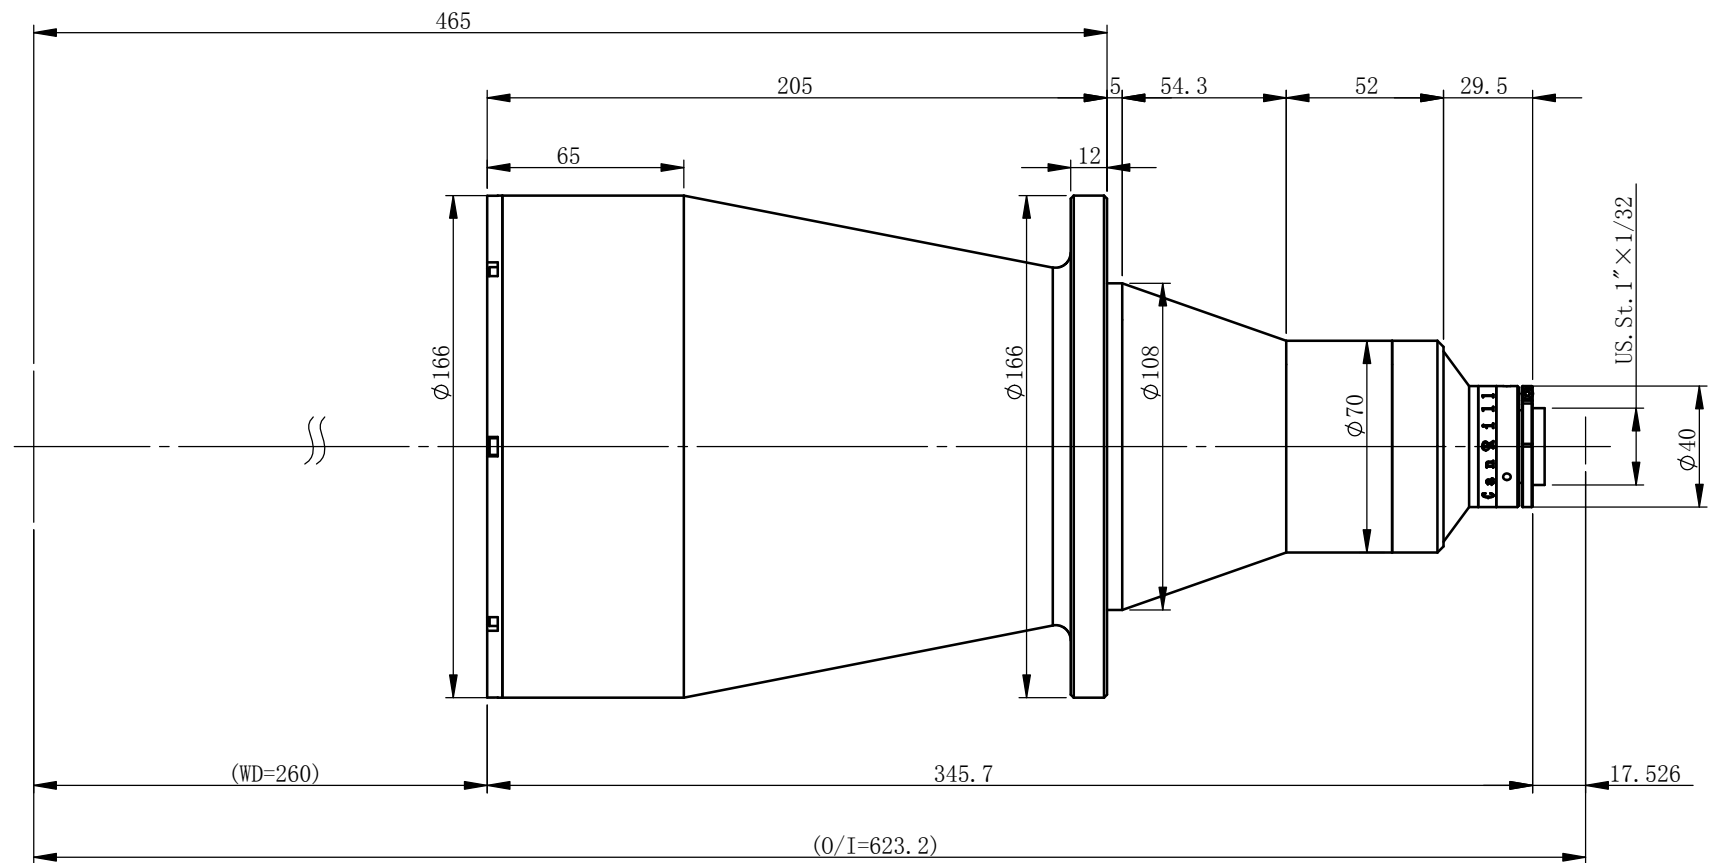

### Specification

Optical structure	Bi-Telecentric
Magnification	0.0656
Object field of view	Φ122.0mm
Image field of view	Φ8mm
Working Distance	260mm±3%
Telecentricity	<0.04°(0.06°)
Depth of field	142.1mm
F#	F5.5
Resolution	55.4μm
MTF	>0.3@185lp/mm
Distortion	<0.090%(0.143%)
Detector type:	

1/2'	6.4×4.8	97.6×73.2mm
1/2.3'	6.2×4.6	94.5×70.1mm
1/2.5'	5.8×4.3	88.4×65.5mm
1/3'	4.8×3.6	73.2×54.9mm

**XF-PTLAAABB-C/F/P/M- (L90E) - (VI)**

**The fourth generation lens of Canrill**

**The camera mount (M & P mount need specify BFL)**

**Variable aperture option**

**Object FOV**

**90° Steering option**

**Image FOV**

Undefined tolerance (mm)	degree	File Name		
X. X	±0.2	±30min	XF-PTL12208-C-外形尺寸-EN	
X. XX	±0.02	Drawing Name		
X. XXX	±0.005	Drawing Size: A3		
	Sign	Data/Ver.	Material	Ratio
Design				1:5
Modify1			Qty	⊕
Modify2			Total:	Page:

Product Name

Canrill OPTICS

All design and drawings are intellectual property of Canrill Optics, can not be copied without Canrill's authorization.